



BORMA WACHS®

Wood Professional Cosmetics



Exterior Line



For decades Borma Wachs has been involved in the wood-care and synthetic surface treatment, with sense of responsibility and constant commitment to follow three fundamental principles Quality, Flexibility, Reliability. Our company profile is characterised by dynamism in production capacity as merchantability and safety of our products.

As specialists in the wood professional cosmetic field, we aim to offer our costumers only the best.



IBR

Borma Wachs products are tested and approved by the Institute for Green Building in Rosenheim. The analyses performed certify our products are compliant in terms of VOC content, biocides, heavy metals, and radioactive materials, guaranteeing full eco-compatibility with Green Building principles. The company has always tried to understand the needs and the sensibility of customers, demanding sustainable and eco-sustainable treatments, deriving from renewable sources of raw materials, aiming to minimise impact on the environment and on the health of operators and people who live in the homes.




EN71-III

Eurofins Danish laboratories have recognised conformity of Borma Wachs oils with standard EN 71-III, relating to the migration of harmful heavy metals, guaranteeing the safety of the treatments in such a way that they can also be safe for use on finishes or repair of children's toys.



VOC FREE

All Borma Wachs products respect European standards relating to solvent vapour emissions, which are potentially dangerous, in the atmosphere, in total respect for the environment and the workers' health. With the new ECO PREMIUM – VOC FREE line, we are able to offer a new and uncompromising range, with 100% natural and biodegradable products, with a VOC content reduced to zero.

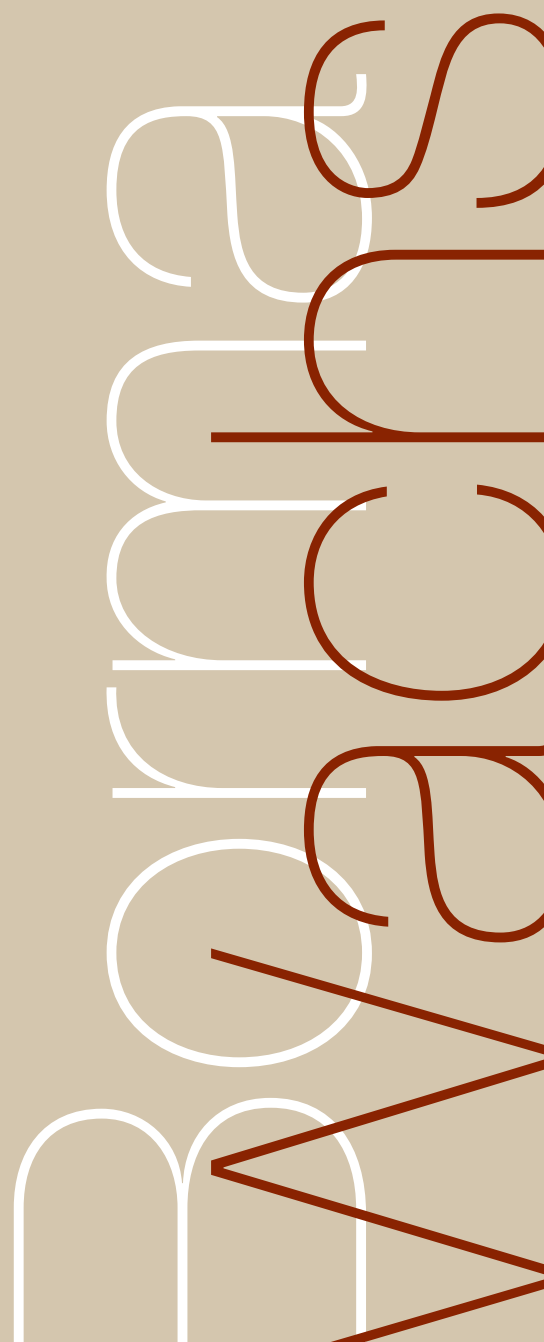

INDEX

Page 2/3
Introduction

Page 4/7
Wood preparation

Page 8/11
Roof- Cladding finishes

Page 12
Specialties

Page 13
Accessories

Page 14
Garden furniture

Page 15
VOC-free oils

Page 16/19
Terraces and decking

Page 20/21
Cleaning and maintenance

Page 22/27
Recommended technologies

Page 28
Thinners and additives

Page 29/31
Borma Color System
World of Colour



BORMA WACHS[®]
Wood Professional Cosmetics

MAINTENANCE AND RESTORATION EXTERIOR WOOD FINISHES:



- When you wish to restore an exterior wood finish, you have to preliminary identify the coating applied and its technical nature (Waterborne, Oil based, Synthetic)
- For a long-term durability Oil based treated surfaces, need to be maintained regularly
- Waterborne treated surfaces must be preferentially maintained/restored with the same products
- Do not apply oils on lacquers (base coats), oil performs only by nature on itself
- To restore Holzwachs Lasur (oil-Wax) treatments, you have to apply a new coat of the same or an Oil mixture. (EX. Decking HD)
- On despite of Oil finishes, while restoring a Waterborne finishes or Synthetic finishes, sanding is required. If the coating is particularly damaged, you can consider to remove it completely with the aid of a paint remover like RADIKAL ABBEIZER



On natural Oils a regular maintenance must be carried out. The protective film obtained by applying oil is subject to progressive deterioration, without flaking or peeling, but with a uniform consumption of the finish. To restore protection, you can use the same finishing oil or a regenerating oil. Sanding, even though it helps obtain an even effect, is not normally necessary. Simply remove the powder and dirt from the surface before proceeding with the new oil application. Carrying out these simple maintenance procedures, the coating will be practically unlimited.


If deterioration only relates to a portion of the surface, you can carry out localised repair without noticeable lines.



There is no general rule for maintenance frequency: it depends on the type of wood the finish, the climatic conditions, exposure and many other factors. However, regular restoration, carried out before the support is beyond repair, would effectively Grant a long-term durability.



Colored finishes last much longer than transparent ones: the pigments that give the color, in fact, protect the wood from the harmful effects of U.V. rays. Even a small quantity of pigments that give slight colouration can considerably increase the duration of the finish.

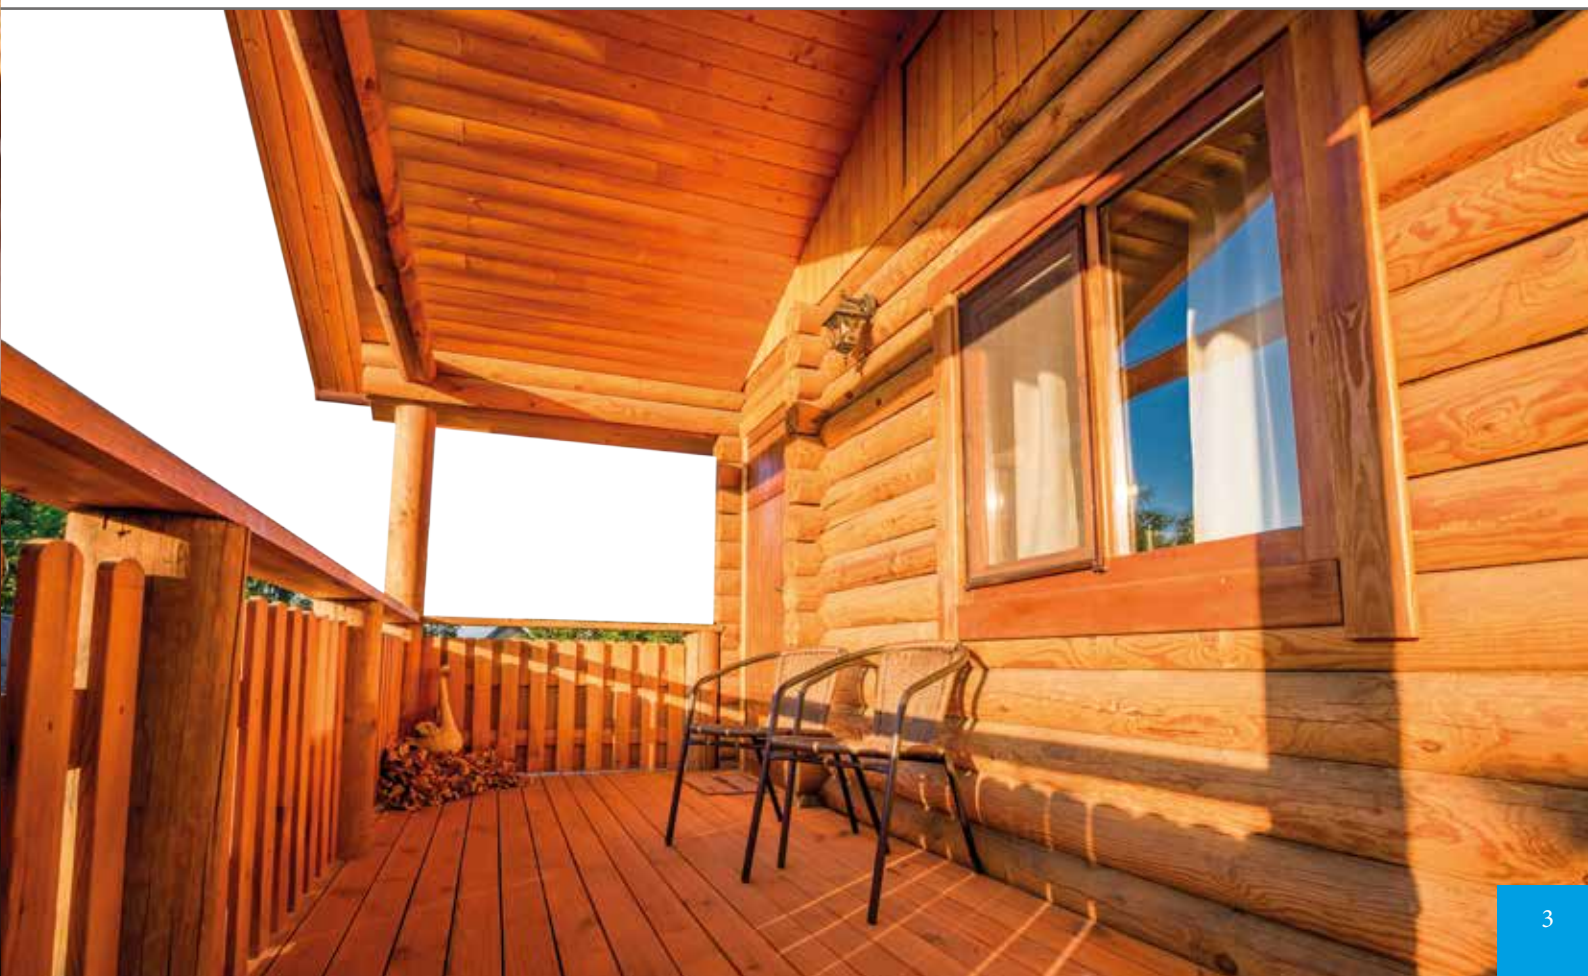

Paint removers

Extra strong paint remover

RADIKAL ABBEIZER

For wood

Removes all types of lacquer, including 2K polyurethanes. Complies with European safety standards. It is available in liquid and gel form. The gel version is particularly suitable for vertical surfaces. It does not contain methylene chloride, is non-corrosive and does not change the colour of the wood.



Recommendations for application:

Generously apply using a brush over the entire surface, leave to work for 10 - 20 minutes until the film softens, remove the old lacquer with steel wool or a brush. For particularly thick lacquer, repeat the operation.



Gel

Code	Cap.	Pack.
0031-ES	750 ml	06 pc.
0032-ES	4 Lt	02 pc.
0033-ES	20 Lt	

Liquid

Code	Cap.	Pack.
0034-ES	750 ml	06 pc.
0036-ES	4 Lt	02 pc.
0038-ES	20 Lt	

Gel paint remover

EXTRA STRONG UNIVERSAL PAINT REMOVER

For all supports

Extra strong gel paint remover with a special solvents mix suitable for any type of surface. Free from methylene chloride, and therefore without sales restrictions. Non-corrosive, it does not change the natural shade of the surface on which it is applied. For professional use.



Recommendations for application:

Generous application, leave to work and remove any residue. Suitable for wood, metal, walls and supports painted in general.



Code	Cap.	Pack.
0031-U	750 ml	06 pc.
0032-U	4 Lt	02 pc.
0033-U	20 Lt	

Water-dilutable paint remover (non soluble) - chloride free

STRONG PAINT REMOVER

For all supports

For dilution in water, a strong gel paint remover, almost odourless, methylene chloride, aromatic and methanol free. It does not change the natural shade of the wood. For professional use. Not subject to sales restrictions.



Recommendations for application:

The action of the water-soluble paint remover is more progressive than Extra Strong Paint remover. You are advised therefore to leave on for longer.



Code	Cap.	Pack.
NAT0031	750 ml	06 pc.
NAT0032	4 Lt	02 pc.
NAT0033	20 Lt	



Intensive cleaning

Intensive wood cleaner - Gel NATURAQUA EXTRA STRONG WOOD CLEANER

Ideal for removing stubborn dirt residue and old treatments and to grease oily wood.

It allows intensive cleaning of wood, removing the stubborn dirt and previous treatments with an oil or alkyl base. It is also particularly useful to degrease exotic wood particularly rich in oils and extracts. In this case, you are recommended to dilute the product with water 1:1. Wet the support with plenty of water before treatment.



Recommendations for application:

Due to the high concentration of organic substances, Extra Strong Wood Cleaner can change the natural colour of the wood, making it darker. To restore the original colour of the wood, subsequently use Exterior Wood Cleaner.

+5°C
+30°C



Code	Cap.	Pack.
0091	1 Lt	12 pc.
0092	5 Lt	02 pc.
0093	10 Lt	
0094	25 Lt	

Wood cleaner - Gel NATURAQUA EXTERIOR WOOD CLEANER

Ideal for deteriorated wood and to revive natural colour.

Cleaner with a single component water base with organic active ingredients. It allows efficient cleaning and prepares the surface before subsequent treatments, removing dirt residue and lightening the colour of the wood. Specifically for exterior use, you are advised to rinse the surface after application. Specifically designed for exterior use.



Recommendations for application:

Wet the support with plenty of water before treatment. Rinse accurately and remove all residue.

+5°C
+30°C



Code	Cap.	Pack.
0075	1 Lt	12 pc.
0076	5 Lt	02 pc.
0075.10	10 Lt	
0075.25	25 Lt	

Wood reviver NATURAQUA BORMA NO GREY

Ideal to remove grey coatings and restore the natural colour of the wood

Water-based detergent to restore wood to its natural colour. Remove the grey coating caused by decomposition of wood under the action of ultraviolet radiation. Apply to the wet surface, leave to act for 5 minutes, then clean the wood with a hard brush. After application, rinse with water. Ideal for coatings, garden furniture, fences and decking.



Recommendations for application:

Rub the surface with a paintbrush or brush until the surface is still wet. The result is immediate. If necessary, repeat the operation.

+5°C
+30°C



Code	Cap.	Pack.
SB5700	1 Lt	12 pc.
SB6700	5 Lt	02 pc.
SB5700.10	10 Lt	
SB5700.25	25 Lt	

Intensive wood cleaner WHITENING 2K SUPER CLEANER

For professional use

2K product ideal for intensive cleaning of wooden surfaces with a whitening effect. Efficiently removes mildew, dirt and residue from underlying exterior woodstain products. The product does not alter the wood fibre, but is corrosive on skin and therefore **for professional use only**.



Recommendations for application:

Use brushes, containers, sponges and paintbrushes in synthetic material. The product can cause undesired oxidation phenomena on metals and damage natural bristles. Only catalyse the quantity strictly necessary for immediate use. Do not keep the mix catalysed; dispose of any residue immediately after use.

+5°C
+30°C



Code	Cap.	Pack.
0062 + 0063	1Lt + 0,5Lt	12 pc.
0068 + 0065	5Lt + 2,5Lt	02 pc.
0066 + 0067	25Lt + 12,5Lt	

Primers, Sealers Borma Classic Line

Special primer BORMA SHIELD

Designed to protect wooden structures before final painting as a surface barrier.

The product was formulated to protect newly built wooden structures, while waiting for subsequent finishing treatments (in general, during the winter). It prevents the wood from greying, efficiently protects against the formation of mildew and fungi and infestation of insects in the period in which wood is left without a finish. It does not alter the natural colour. Characterised by an excellent penetration capacity, it enables the subsequent application of oils and any further finishing.



Recommendations for application:

The product can also be used as a pre-treatment before exterior woodstain products, lacquers or oils. Thanks to the considerable content of the active principles and the high penetration capacity, the material guarantees greater protection and makes the coating last longer. Exterior use.



Customizable with Borma Color System

Code	Cap.	Pack.
3630	1lt	06
3631	5Lt	02
3632	10Lt	
3633	20Lt	

Special insulating primer BORMA SUPER SHIELD 2K

It is a high-performance 2- components, polyurethane based, with a preservative and insulating function, expressly studied for resinous woods. Fast drying and excellent sanding, allows to obtain closed / semi-closed pore finishes. The cycle can be completed with Exterior Wood Lack 2k, Naturaqua Exterior Wood lack 2k or Decking Oil HD.



Recommendations for application:

It can be applied by brush, roller or spray. Suggested for professional use.

Cod.	Cap.	Conf.
36302K	1 Lt.	06 pc.
36312K	5 Lt	02 pc.
36322K	10 Lt	
36332K	20 Lt	

Heavy duty insulator HOLZWACHS LASUR ALF

Special for bleached surfaces.

The Borma whitening, 2K super detergent effectively cleans wood by intensively bleaching the shade. After the whitening action, apply specific HOLZWACHS LASUR ALF sealer to prevent unwanted reactions between the finishing products and the bleaching agents. For exterior parts, once ALF dries, you are advised to complete the treatment with the desired finishing products.



Recommendations for application:

You need to ensure the quantity of the material applied is sufficient to protect the surface. If you wish, you can paint Holzwachs Lasur ALF with the specific oil pigments.



Customizable with Borma Color System

Code	Cap.	Pack.
3320XX-ALF	750ml	06 pc.
3322XX-ALF	2,5Lt	02 pc.
3330XX-ALF	5Lt	02 pc.
3344XX-ALF	10Lt	
3340XX-ALF	20Lt	



Refurbishing uniforming basecoat

RINOVA


Uniforming, odorless basecoat of exceptional covering power, ideal for restoring exposed wood outdoors. Its high concentration allows to obtain a covering and masking effect in one single coat, even on gray, stained and deteriorated surfaces, avoiding heavy washing or sanding operations. The product performs an action of protection and insulation on the treated substrate and facilitates the drafting of the next finish, semi-transparent for a natural effect, full pigmented for a decorative effect. Special protective agents prevent the attack of pathogens such as fungi and insects.



Recommendations for application:

RINOVA is ready to use, quick drying and easy to apply; for the subsequent finish we recommend Holzwachs Lasur or Dekorwachs Lasur.

Cod.	Cap.	Conf.
3370	1 Lt.	06 pc.
3371	5 Lt	02 pc.
3372	10 Lt	
3373	20 Lt	

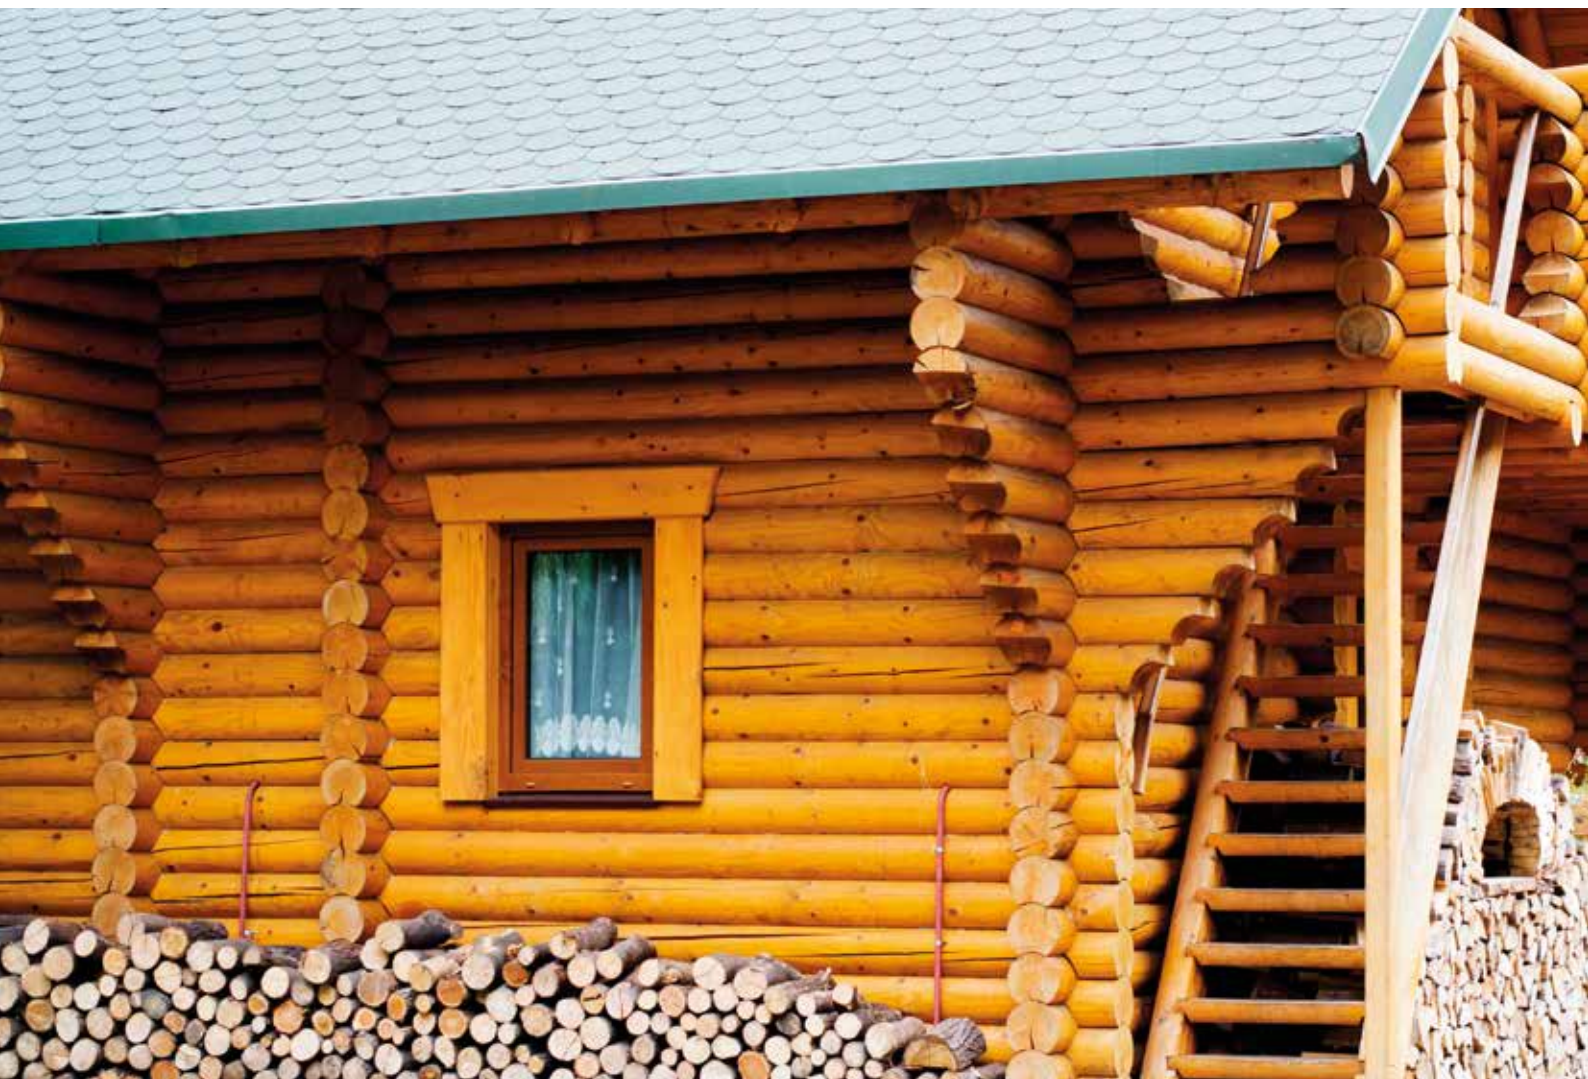

WOOD PREPARATION

Primers, Sealers Borma Naturaqua Line

Special water-based primer NATURAQUA BORMA SHIELD

Designed to protect wooden structures before final painting as a surface barrier.

Product formulated to protect newly built, wooden structures while waiting for the subsequent finishes. Water-based, odourless and quick drying, it effectively protects against mildew, fungi formation and insect infestation, even in the absence of other treatments. It does not change the colour of the wood and allows subsequent application of any finish.



Recommendations for application:

The product can be used as a pre-treatment before exterior woodstain products, lacquers or finishes in general. Thanks to the considerable content of active principles, it is recommended in water based finishing cycles to guarantee greater protection and prolong the duration of the coating. Exterior use.



Customizable with Borma Color System

Code	Cap.	Pack.
NAT3630	1lt	06 pc.
NAT3631	5Lt	02 pc.
NAT3632	10Lt	
NAT3633	20Lt	

Sealer NATURAQUA WOOD SEALER

Ideal for oily wood and as a "natural effect" fixative.

Clear, acrylic insulator for interior and exterior use. It creates an imperceptible film for a "raw wood" effect.

Application areas:

- as a preliminar sealer to guarantee good adhesion of the waterborne finishes to water on oily, exotic wood such as teak, iroko and similar
- as a surface fixative for finishes with a "natural wood" effect.



Recommendations for application:

Catalyse the product with BORMA 4100-2K at 10% to improve its surface strength.



Customizable with Borma Color System

Code	Cap.	Pack.
NAT4090	750 ml	06 pc.
NAT4091	5 Lt	02 pc.
NAT4090.10	10 Lt	
NAT4090.20	20 Lt	

Special sealer NATURAQUA SUPER WOOD SEALER

Anti-tannin basecoat

Water based sealer with specific tannin resistant barrier function. It avoids tannin surfacing and allows subsequent water-based finishes without the formation of unpleasant yellow or brown stains.



Recommendations for application:

Available both as a transparent or white coat, it is ideal for light finishes. Applied in two coats, it does not require use of further bases before the finish.



Customizable with Borma Color System

Code	Cap.	Pack.
NAT4090-S	750ml	06 pc.
NAT4091-S	5Lt	02 pc.
NAT4090.10-S	10Lt	
NAT4090.20-S	20Lt	

Sealers – intermediate Borma Naturaqua Line

Thixo high solid sealer NATURAQUA LOG SEALER

Ideal to protect exposed ends of beams and planks

Water-based sealer, formulated to protect the end of beams, stakes and other wooden structures not protected by logs, poles, other wooden structures exposed to damp and adverse weather conditions. Also suitable for sealing longitudinal cracks. It blocks humidity penetrating the wood, preventing mildew formation and thereby extending the useful life of the protective coating and the manufactured piece in general. You are advised to apply before proceeding with application of coloured products to guarantee greater uniformity. Clear, it has excellent resistance against UV rays.



Recommendations for application:

The product can be coloured with Water-Based Pigments. Apply as a first or intermediate product for water-based finishing cycles or traditional solvent-based ones. Apply as the last produce for oil finishing cycles, to enable this material to penetrate the wood.



Customizable with Borma Color System

Code	Cap.	Pack.
0310	750ml	06 pc.
0311	2,5Lt	02 pc.
0312	5Lt	
0310.20	20Lt	

Window sealer NATURAQUA END GRAIN WINDOW SEALER

To improve protection to joints, doors, windows and fittings in general.

Specific sealer to protect corner joints of door and window fittings against humidity and surface deterioration. On the 45 degree joints, coverage of finishes is often weak, especially in the case of spray applications. Corresponding to these critical points, the finish can start to flake, prejudicing the duration of the coating. Sealer for door and window fittings prevents such phenomena, prolonging the life of the manufactured piece.



Recommendations for application:

After applying the exterior woodstain, apply the sealer for joints, in light excess, and then sand. Complete the finishing cycle with Top Gel Tixio or Naturaqua Top Gel.



Code	Cap.	Pack.
0646	250 ml.	12 pc.
0647	500 ml.	12 pc.





ROOF- CLADDING FINISHES



WAX-BASED FINISHES Full pigmented finishing

Solid colour full covering finish

DEKORWACHS LASUR SOLID - Oil-Wax Based - Interior and exterior

For claddings, roof, windows, fences

Dekorwachs Lasur is a satin waxed finish for interiors and exteriors, in a special series of bright or pastel colours. Thixotropic, it gives excellent coverage and is highly resistant against light. The product is ready for use, demonstrating excellent elasticity, without any flaking phenomena over time. With a natural oils base, high quality resins, UV filters and preservatives, it protects the wood from biological agents and adverse weather conditions. The product is easy to apply and does not drip even when applied on vertical surfaces.



Recommendations for application:

Application of two coats is recommended. To renew the coating, simply apply a coat on the dry and clean surface. No need to sand.



Customizable with Borma Color System

Code	Cap.	Pack.
3320XX-DEC	750 ml	06 pc.
3322XX-DEC	2,5 Lt	02 pc.
3330XX-DEC	5 Lt	02 pc.
3344XX-DEC	10 Lt	
3340XX-DEC	20 Lt	

Solid colour full covering finish

NATURAQUA DEKORWACHS LASUR SOLID - Enriched with Oil-Wax - Interior and exterior

For claddings, roof, windows, fences

Naturaqua Dekorwachs Lasur is a highly solid, satin, water-based finish, suitable both for interiors and exteriors, in a special range of bright or pastel colours. It has excellent coverage power and high resistance against light. The product, ready for use, demonstrates excellent elasticity and is fast drying. With a high-quality resin base, UV filters and preservatives, it protects the wood from biological agents and adverse weather conditions. The product, is easy to apply and is non-drip.



Recommendations for application:

For a long term durability application of minimum two coats is recommended, using a brush or spray. The level of protection offered by DEKORWACHS LASUR and NATURAQUA DEKORWACHS LASUR is very similar, however, when the maintenance is needed, the water-based version requires intermediate sanding between the coats.



Customizable with Borma Color System

Code	Cap.	Pack.
NAT3315XX-DEC	750ml	06 pc.
NAT3325XX-DEC	2,5Lt	02 pc.
NAT3335XX-DEC	5Lt.	02 pc.
NAT3315.10XX-DEC	10Lt.	
NAT3315.20XX-DEC	20Lt.	

Clear UV protection

UV WEATHER OIL

Blend of oil, waxes and natural resins for the correct finishing of exterior treatments. It is a transparent oil recommended as topcoat after staining. Thanks to its special UV-filters, it consistently prolongs life of colored and raw wood, keeping it from graying and oxidation.



Recommendations for application:




Apply in one single layer after Holzwachs Lasur or Dekorwachs lasur as final protection

Cod.	Cap.	Conf.
3933.UV	1 Lt.	06 pz.
3934.UV	5 Lt	02 pz.
3933.10.UV	10 Lt	
3933.20.UV	20 Lt	



BORMA WACHS®
Wood Professional Cosmetics

Colour chart

 <p>50 White</p>	 <p>133 Sage green</p>	 <p>136 Pine green</p>	 <p>115 Ivory</p>
 <p>42 Lobster</p>	 <p>06 Natural mustard</p>	 <p>122 Orchid orange</p>	 <p>125 Poppy red</p>
 <p>120 Sunshine yellow</p>	 <p>63 Dark chocolate</p>	 <p>128 Red mahogany</p>	 <p>59 Chocolate</p>
 <p>100 Ice grey</p>	 <p>140 Navy blue</p>	 <p>81 Spring green</p>	 <p>116 Dove grey</p>





ROOF- CLADDING FINISHES



WAX-BASED FINISHES

Natural finishing

Translucent wood-tone finish

HOLZWACHS LASUR - Oil-Wax Based - Interior and exterior

For claddings, roof, windows, fences

Holz wachs Lasur is a satin, wax finish, for interiors and exteriors, with a natural oil, wax and resin base. It can be diluted with products from the Solvoil range, penetrating the wood to create a decorative, protective and highly elastic layer on the surface. Water repellent and breathable, it does not flake. It contains UV filters and additives for wood protection. Application of two or three coats is recommended. To renew the coating, simply apply a coat on the dry and clean surface. There is no need to sand.



Recommendations for application:

Holz wachs Lasur creates a natural, satin effect. For a more decorative effect and greater protection, one or two coats of Weather Oil UV can be applied on it.



Customizable with Borma Color System



Code	Cap.	Pack.
3320XX	750 ml	06 pc.
3322XX	2,5 Lt	02 pc.
3330XX	5 Lt	02 pc.
3344XX	10 Lt	
3340XX	20 Lt	

Translucent wood-tone finish

NATURAQUA HOLZWACHS LASUR - Oil-Wax Based Finish - Interior and exterior

For cladding, roof, windows and fences

Waterborne waxed exterior woodstain for interiors and exteriors acrylic based, dilutable in water. Odourless, it enhances the grain of the wood using natural and bright colours for deep penetration of the wood. Water repellent and breathable, it protects the wood from atmospheric agents, also thanks to the UV filters. It contains additives to protect the wood against harmful biological agents. Application of two or three coats is recommended.



Recommendations for application:

The colours of NATURAQUA HOLZWACHS LASUR are brighter than the same HOLZWACHS LASUR oil-wax base. The level of protection offered by the two products is very similar, however the water-based version needs intermediate sanding between the coats and restoration phase.



Customizable with Borma Color System



Code	Cap.	Pack.
NAT3305XX	375 ml	06 pc.
NAT3315XX	750 ml	06 pc.
NAT3325XX	2,5 Lt	02 pc.
NAT3315.10XX	10 Lt	
NAT3315.20XX	20 Lt	

High solid, deep penetrating waxed impregnating agent

HOLZWACHS LASUR HD50

Blend of natural oils, waxes and resins, special for indoor / outdoor wood paneling. Self-sealing, it gives color and protection. Thanks to its deep penetration of wood fibers and high solid content, applied in two or three coats, it guarantees long-lasting protection. Suitable for metallic decorative effects, also for outdoor.



Recommendations for application:

HD50 is characterized by an extremely easy application thanks to its high viscosity and excellent brushability. Very easy maintenance (no sanding required).



Customizable with Borma Color System





Cod.	Cap.	Conf.
3320XX-HD	750 ml	06 pc.
3322XX-HD	2,5 Lt	02 pc.
3330XX-HD	5 Lt	02 pc.
3344XX-HD	10 Lt	
3340XX-HD	20 Lt	



BORMA WACHS®
Wood Professional Cosmetics

Colour chart

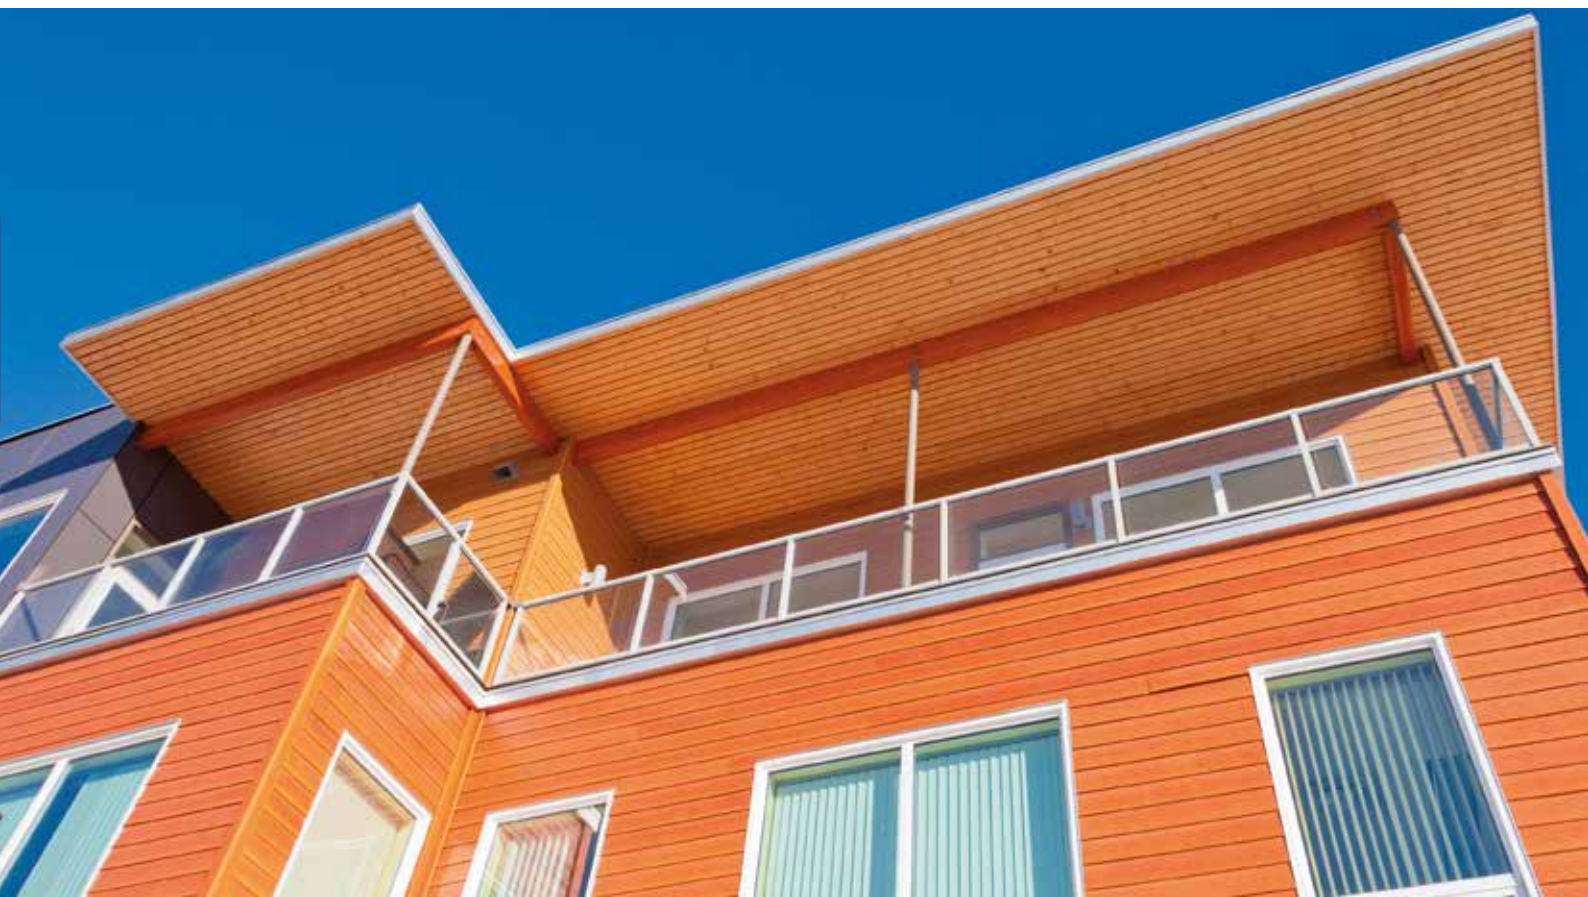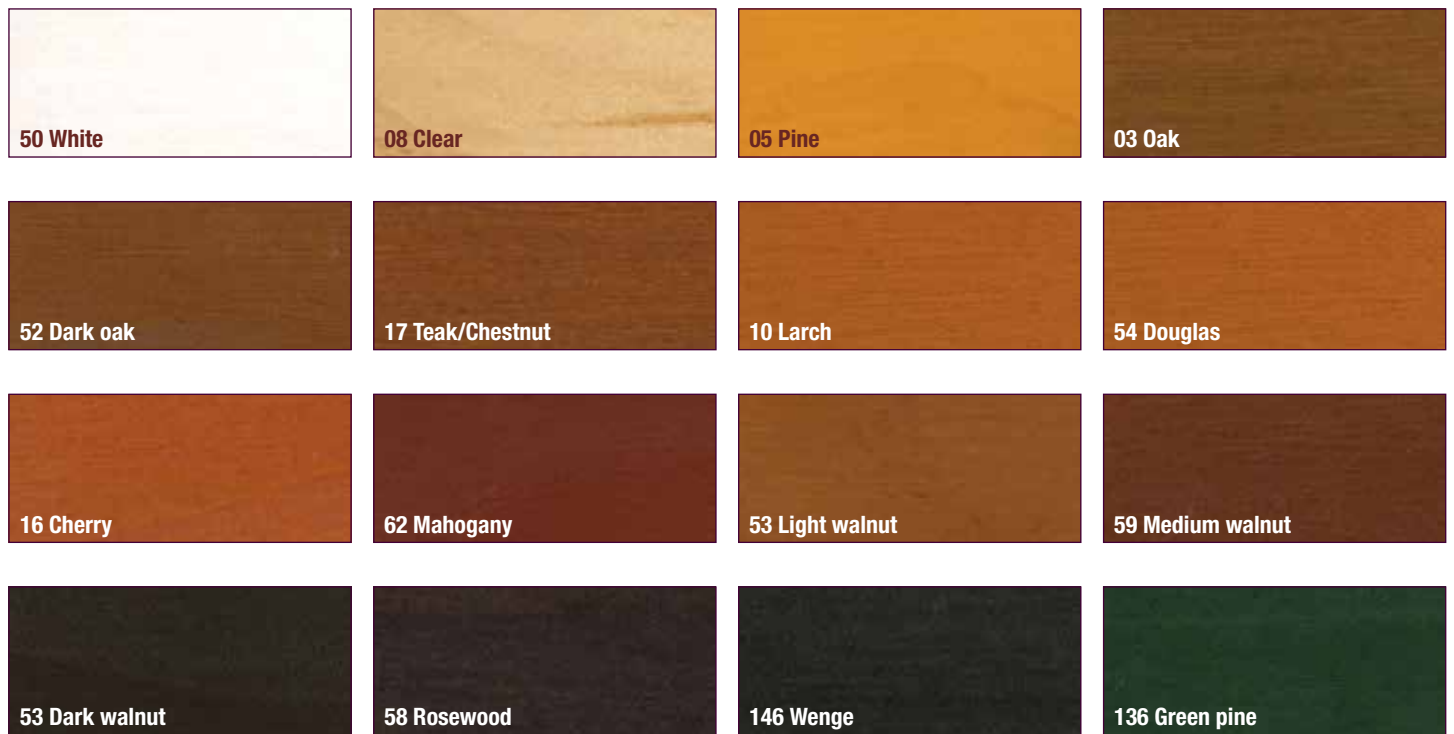



ROOF/CLADDINGS



EXTERIOR WOODSTAINS AND FINISHES Borma Classic Line

Translucent exterior woodstain

HOLZ LASUR

Ideal for protection and wood coloration

Protective and decorative exterior woodstain for interiors and exteriors with depth wetting properties. It colours the wood, enhancing the grain. It contains UV filters and antiseptic additives that provide effective protection against fungi and insects. Colours are light resistant and have good resistance to atmospheric agents.

Apply by brush, spray, dipping.



Recommendations for application:

Naturaqua Holz Lasur colours are normally brighter, however solvent-based Holz Lasur is characterised by a better penetration and protection capacity.



Customizable with Borma Color System



Code	Cap.	Pack.
3610XX	375 ml	06 pc.
3611XX	750 ml	06 pc.
3612XX	2,5 Lt	02 pc.
3613XX	10 Lt	
3614XX	20 Lt	

Decorative wax finish

TOP GEL TIXO - Thixotropic wax finish - Non-drip

TOP GEL TIXO HS - High solid wax finish - High performance

(Interior/Exterior use)

Long term durable alkyd-urethane based, wax finish for interiors and exteriors. It enhances the wood grain with natural and bright colours, deeply penetrating the wood. Water repellent and breathable, it protects the wood from atmospheric agents, also thanks to UV filters. It contains antiseptic additives to protect the wood against harmful biological agents. Application of two coats is recommended. To renew the coating, simply apply a coat on the dry and clean, preliminary sanded surface.



Recommendations for application:

To enhance coating performances, apply Holz Lasur as a first coat.



Customizable with Borma Color System




TIXO - Solid 36%

Code	Cap.	Pack.
3305XX	375 ml	06 pc.
3315XX	750 ml	06 pc.
3325XX	2,5 Lt	02 pc.
3315.10XX	10 Lt	
3315.20XX	20 Lt	

TIXO HS - Solid 70% (transparent only)

Code	Cap.	Pack.
3315-HS	750 ml	06 pc.
3325-HS	2,5 Lt	02 pc.
3315.10-HS	10 Lt	
3315.20-HS	20 Lt	

Colour chart

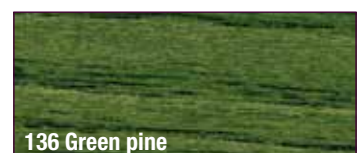

TRADITIONAL EXTERIOR WOODSTAINS AND FINISHES

Borma Naturaqua Line

Waterborne exterior woodstain

NATURAQUA HOLZ LASUR

Ideal for protection and wood coloration

Protective and decorative exterior woodstain for interiors and exteriors with a water base. It colours the wood, enhancing the grain. Colors are light resistant. Naturaqua Holz lasur contains UV filters and additives that provide efficient protection against fungi and insects. Good resistance to atmospheric agents. Recommended application: brush, spray, dipping.



Recommendations for application:

Naturaqua Holz Lasur acts to protect against UV rays and biological agents. To increase strength over time, you are advised to complete the cycle with a finish (Naturaqua Top Gel).



Customizable with Borma Color System



Code	Cap.	Pack.
NAT3610XX	375 ml	06 pc.
NAT3611XX	750 ml	06 pc.
NAT3612XX	2,5 Lt	02 pc.
NAT3613XX	10 Lt	
NAT3614XX	20 Lt	

Decorative exterior finish

NATURAQUA TOP GEL

Waterborne top coating

Acrylic/waxy based, it is flexible, transparent and colourless, perfect for exterior use. Thanks to the high solid content, it enables a considerably thick protective film to be obtained. It guarantees efficient protection against UV radiation. Available: waxed (30 gloss) and semi-gloss (60 gloss).



Recommendations for application:

If necessary, the product can be diluted with water, however to preserve the technical features of the coating, the quantity of water must not exceed 10%.



Customizable with Borma Color System



Top Gel 60 semi-gloss

Code	Cap.	Pack.
NAT3350-60XX	375ml	06 pc.
NAT3351-60XX	750 ml	06 pc.
NAT3352-60XX	2,5 Lt	02 pc.
NAT3351.10-60XX	10 Lt	
NAT3351.20-60XX	20 Lt	

Top Gel 30 waxed

Code	Cap.	Pack.
NAT3350XX	375 ml	06 pc.
NAT3351XX	750 ml	06 pc.
NAT3352XX	2,5 Lt	02 pc.
NAT3351.10XX	10 Lt	
NAT3351.20XX	20 Lt	

Colour chart



Varnishes Special boat lacquers

FLATTING EXTRA MARINE

For boat decks, exterior coatings and floors

High solid, high quality lacquer, ready to use, with excellent elasticity and high filling power. Prevents cracks and flaking. Suitable both for interior and exterior use, also on exotic wood. Enriched with UV filters, it forms a considerably thick protective film, resistant to water and adverse weather conditions. Available in satin (30 gloss) and gloss (80 gloss) finish. Non-dripping.



Recommendations for application:

For preliminary colouration of the surfaces, you can apply Holz Lasur exterior woodstain, then proceed to finish with two coats of Flattig Extra Marine. To ensure it lasts over time, Flattig Extra Marine can be directly pigmented with Oil Concentrates COXX.



Customizable with Borma Color System



Gloss

Code	Cap.	Pack.
3925	375 ml	06 pc.
3926	750 ml	06 pc.
3927	2,5 Lt	02 pc.
3928	10 Lt	
3929	20 Lt	

Matt

Code	Cap.	Pack.
3925-30	375 ml	06 pc.
3926-30	750 ml	06 pc.
3927-30	2,5 Lt	02 pc.
3928-30	10 Lt	
3929-30	20 Lt	

NATURAQUA FLATTING EXTRA MARINE

For boat decks, exterior coatings and floors

Self-sealer waterborne paint, ready for use and especially formulated for the nautical sector, with high elasticity and filling capacity. Ecofriendly, with very low emissions, with UV filters and additives, it protects wood, giving deep penetration providing a perfect resistant film that resists water and adverse weather conditions, enhancing the appearance and its natural beauty.



Recommendations for application:

For preliminary coloration of the surfaces, the application of Naturaqua Holz Lasur exterior woodstain, is suggested then proceed to finish with two coats of Naturaqua Flattig Extra Marine. To implement its duration over time, Naturaqua Flattig Extra Marine can be directly colored with Water-Based Pigments.



Customizable with Borma Color System



Gloss

Code	Cap.	Pack.
NAT3925	375 ml	06 pc.
NAT3926	750 ml	06 pc.
NAT3927	2,5 Lt	02 pc.
NAT3928	10 Lt	
NAT3929	20 Lt	

Matt

Code	Cap.	Pack.
NAT3925-30	375 ml	06 pc.
NAT3926-30	750 ml	06 pc.
NAT3927-30	2,5 Lt	02 pc.
NAT3928-30	10 Lt	
NAT3929-30	20 Lt	





EQUIPMENT

OIL APPLICATION BRUSHES

Special for floors-decks

Special brushes for the application of oils and paints on interior and exterior floors. In natural bristle, they enable easy and fast application on wide surfaces such as terraces and decks. Wash with specific solvent after use. Measurements available: 150cm, 250cm, 380cm.

380mm



250mm



150mm



Code	Dim.
6394.380	380mm
6394.250	250mm
6394.150	150mm

CAN OPENING SPATULA

Universal

Metal spatula to easily open cans and mix products or pastes. The spatula is 28 cm long. The polymer handle ensures a correct grip, while the steel structure makes the spatula resistant to chemical agents and mechanical stress. Ideal for mixing products contained in medium-small packaging.



Code
6448





GARDEN FURNITURE



OILS

Wood oil

TEAK OIL

Ideal to treat garden furniture and other exterior surfaces

Oil-based product, ready for use, suitable for all wooden surfaces, both interior and exterior. It makes the surface water-repellent and gives the surface a pleasantly natural appearance. Also suitable for dipping. Protects against atmospheric and biological agents and enhances the natural beauty of the wood. Clear or pigmented. It does not flake and does not require sanding.



Recommendations for application:

It can be used alone as a periodic treatment of the surfaces or as a coloured base before finishing with transparent oil (e.g. Decking Oil HD – Danish Oil).



Customizable with Borma Color System

Code			Cap.	Pack.
0360	0360-DSXX	0360-LSXX	500 ml	12 pc.
0361	0361-DSXX	0361-LSXX	1 Lt	12 pc.
0362	0362-DSXX	0362-LSXX	5 Lt	02 pc.
0365	0365-DSXX	0365-LSXX	10 Lt	
0365.20	0365.20-DSXX	0365.20-LSXX	20Lt	
DSXX (dark shades): 1011+1461+1471+581+601+621+631				
LSXX (light shades): 171+172+301+511+927				

Waterbased Teak Oil NATURAQUA TEAK OIL

Interior/exterior use

Oils in aqueous dispersion reinforced with resin ready for use for interiors and exteriors. Odour-free, the product provides a non-greasy, protective film which is perfectly water-resistant, with a pleasant satin appearance. Easily applied, the oils deeply penetrate to protect the wood from adverse weather conditions and harmful agents, developing tone and natural beauty. Enriched with UV filters.



Recommendations for application:






You are advised not to apply on heated wood, or however in direct sunlight.



Customizable with Borma Color System

Code	Cap.	Pack.
NAT0360XX	500 ml	12 pc.
NAT0361XX	1 Lt	06 pc.
NAT0362XX	5 Lt	02 pc.
NAT0365XX	10 Lt	
NAT.0365.20XX	20Lt	

Colour chart

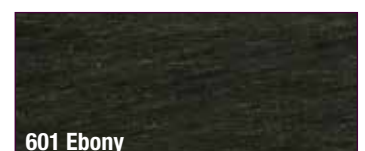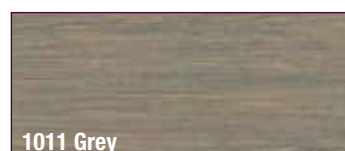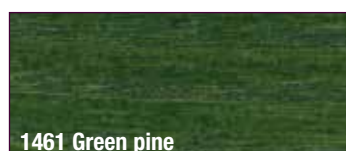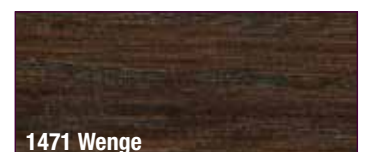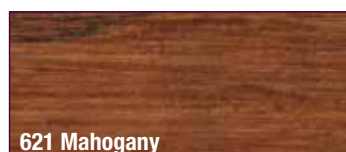



VOC FREE OILS

Pure vegetable oil TUNG OIL

Natural oil to protect wood

100% natural oil obtained from the fruit of the Tung tree. It offers good surface hardness and resistance against humidity. With a light amber colour, tung oil is a traditional product to protect wood from atmospheric agents.



Recommendations for application:

To increase the level of absorption and improve durability, dilute with Solvoil Plus (or another product from the Solvoil range) in the ratio 1:1. Apply in multiple coats, with adequate intermediate drying, up to saturation of the surface. After 24 hours, you can polish the surface with steel wool 0000 or with a white abrasive pad.



Code	Cap.	Pack.
3990	150 ml.	12 pcs.
3991	500 ml.	12 pcs.
3992	1 Lt.	12 pcs.
3993	5 Lt.	02 pcs.
3994	25 Lt.	

Oil finishes for exteriors ECO PREMIUM EXTERIOR WOOD OIL

To treat all exterior surfaces

With a natural oils base, enriched with UV filters, the product guarantees protection of all exterior surfaces without releasing VOC and with a pleasantly natural effect. It does not peel and is suitable for all types of wood. It contains active principles that protect the support from harmful agents.



Recommendations for application:

The product can be coloured with oil pigments (3-5% for semi-transparent lacquer, 10-15% for coating lacquer). The addition of the pigments gives longer duration of the coating.



Code	Cap.	Pack.
VOC0378XX	500 ml	12 pc.
VOC0379XX	1 Lt	12 pc.
VOC0379.5XX	5 Lt	02 pc.
VOC0379.10XX	10 Lt	
VOC0379.20XX	20Lt	

Colour chart

08 clear



05 pine



16 cherry



17 teak



53 light walnut



63 dark walnut



62 mahogany





TERRACES AND DECKING



OILS

Finishes for terraces

TERRACE OIL - Decking Oil Natural

Ideal for treating and protecting terraces, decks, stairs and walkways in wood.

This decking oil is formulated on the basis of reinforced, natural oils, with a high penetration coefficient. Thanks to its low viscosity, it deeply penetrates the wood and thanks to the high solid content gives efficient protection and breathability without flaking phenomena and with a natural, satin effect. Enriched with UV filters and antiseptic additives, the product is characterised by extremely easy application, even if coloured, and for maintenance, anytime, no sanding required.



Recommendations for application:

To obtain a further decorative effect and greater protection, you can apply a coat of Decking Oil HD – Danish Oil over it. Restore without sanding.




Customizable with Borma Color System

Color chart



50 White

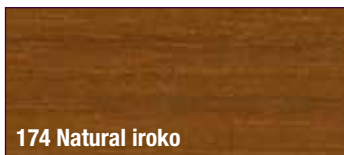

174 Natural iroko



512 Oak



729 Larch



173 Teak



302 Cherry



622 Mahogany




582 Rosewood



1472 Wenge




632 Dark walnut

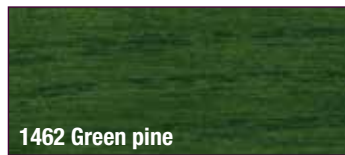

1462 Green pine



1012 Grey

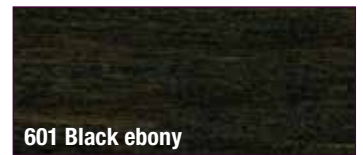

601 Black ebony

Code			Cap.	Pack.
4971-IL	4971IL-DSXX	4971IL-LSXX	1 Lt	06 pc.
4977-IL	4977IL-DSXX	4977IL-LSXX	2,5 Lt	02 pc.
4972-IL	4972IL-DSXX	4972IL-LSXX	5 Lt	02 pc.
4975-IL	4974IL-DSXX	4974IL-LSXX	10 Lt	
4973-IL	4973IL-DSXX	4973IL-LSXX	20Lt	
DSXX (dark shades): 1012+1462+1472+50+582+601+622+632				
LSXX (light shades): 173+174+302+512+729				



Danish oil DECKING OIL HD

For exterior wood

High decorative special oil mixture with low environmental impact. Odour-free, with high breathability, it protects every type of wood. Characterised by rapid drying, it gives the wooden surface a pleasant decorative effect. UV filters and preservatives make it special for exterior use. Formaldehyde free. Available in 6 shades (see Colour Chart) plus clear.



Recommendations for application:

Recommended as a transparent finish, it can be applied over various coloured products to increase its protection coefficient: Holz Lasur, Holzschutz Lasur and Teak Oil.



Customizable with Borma Color System



Code	Cap.	Pack.
4971	1 Lt	06 pc.
4977	2,5 Lt	02 pc.
4972	5 Lt	02 pc.
4975	10 Lt	
4973	20Lt	

Water-based oil NATURAQUA DECKING OIL

For exterior wood

Naturaqua Decking Oil is a mix of emulsified oils in water reinforced with resins to treat wood intended for outdoor environments. Ready for use. Over time, it deteriorates but does not flake, is easy to apply and has excellent penetration. Produced with the highest quality raw materials, enriched with special UV filters, it guarantees excellent protection against atmospheric agents. Especially for exterior wood. Available in 6 shades (see Colour Chart) plus transparent-clear.



Recommendations for application:

You are advised not to apply on heated wood, or however in direct sunlight.



Customizable with Borma Color System



Code	Cap.	Pack.
NAT4971	1 Lt	06 pc.
NAT4973	2,5 Lt	02 pc.
NAT4974	5 Lt	02 pc.
NAT4976	10 Lt	
NAT4975	20Lt	

Two components oil DECKING OIL 2K

For exterior wood - high performance - VOC FREE

Mix of natural oils, with zero emissions, especially formulated to protect exterior wooden surfaces. Enriched with UV filters and preservatives, it guarantees advanced protection against atmospheric and biological agents. The addition of the catalyser increases its surface performance, making it an ideal finish for terraces and decks in exotic wood. Odour-free, available in the colours on the chart, it can be customised to your desired colour using the oil pigments.



Recommendations for application:

Ready to use. To facilitate brush application, it could be advisable to dilute with Solvoil Plus. Exclusively after adding the catalyser. Preferably avoid application on heated supports or in direct sunlight. Application of the product must be carried out as evenly and continuously as possible, without stopping.



Customizable with Borma Color System



Code	Cap.	Pack.
49712K + 4951K	1 Lt + 100ML	06 pc.
49772K + 4952K	2,5 Lt + 250ML	02 pc.
49722K + 4953K	5 LT + 500ML	02 pc.
49752K + 4954K	10 LT + 1Lt	
49732K + 4955K	20 Lt + 2 Lt	

Decking Oils Color chart

08 clear



05 pine



16 cherry



17 teak



53 light walnut



63 dark walnut



62 Mahogany





TERRACES AND DECKING



OILS - Specialties

Finishes for thermo-treated wood

THERMOWOOD OIL

Specific formulation for deep penetration

Thermo-treated wood is characterised by very high density and compactness, which often prevents correct adhesion of conventional finish products. Thermowood Oil is formulated specifically for deep penetration and therefore to be well-absorbed also by difficult surfaces with minimum wetting. Enriched with UV filters and protective additives of the wood, it creates a protective film resistant to wear, ideal for all manufactured pieces in heat-treated wood, including floors, terraces and decks. Available in 4 colours with a natural effect, plus clear.

Application of at least two coats is recommended.



Recommendations for application:


The product is ready for use, but in the event of particularly compact surfaces, the first coat of Thermowood oil can be diluted at 50% with Solvoil 06, slow drying solvent. Proceed to apply subsequent coats without dilution.



Customizable with Borma Color System

Code	Cap.	Pack.
4978XX	1 Lt	06 pc.
4979XX	5 Lt	02 pc.
4978XX.20	20 Lt.	

Colour chart

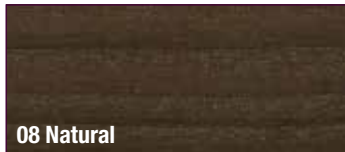

08 Natural



53 Light



59 Medium



63 Dark





LACQUERS

Borma Classic Line

EXTERIOR WOOD LACK 2k

For exterior wood - high performance

Two-components lacquer ideal for exterior flooring and surfaces in wood in general, with a pleasant decorative effect. It gives excellent protection against atmospheric agents and normal wear, guaranteeing a long duration over time.



Recommendations for application:

It does not require specific primer, but you can apply Holz Lasur as a first coat to ensure the coating lasts longer. Recommended application of two or three coats, with a roller, spray or brush. Preferably avoid application on heated supports or in direct sunlight. Available in matt, satin and gloss.



Customizable with Borma Color System

EXTERIOR WOOD LACK 2K (Catalysis ratio 1:1)		
Code	Cap.	Pack.
41102K + 4110K	1Lt + 1Lt	6+6 pc.
41112K + 4111K	2,5 Lt + 2,5 Lt	2+2 pc.
41122K + 4112K	5 Lt + 5Lt	2+2 pc.
41132K + 4113K	20 Lt + 20 Lt	

Borma Naturaqua Line

NATURAQUA EXTERIOR WOOD LACK 2K

For exterior wood - high performance

Two components water-based lacquer ideal for exterior flooring and surfaces in wood in general, with a pleasant decorative effect. It gives excellent protection against atmospheric agents and against normal wear. Natural effect, it does not affect wood shade. Available in the following glosses: natural effect 10-20%, matt 30-40%, semi-gloss 50-60%, gloss 80-90%.



Recommendations for application:

To guarantee the best performance, you are advised to apply the product as a first coat diluted 1:1 in water or Wood Sealer. Preferably avoid application on heated supports or in direct sunlight. Catalysis ratio: 10:1 - Pot life: 2-3 hours at 20°C



Customizable with Borma Color System

NAT. EXTERIOR WOOD LACK 2K (Catalysis ratio 10:1)		
Code	Cap.	Pack.
NAT41102K + NAT 4099-2K	1Lt + 100ml	6+6 pc.
NAT41112K + NAT 4100-2K	2,5Lt + 250ml	2+2 pc.
NAT41122K + NAT 4101-2K	5Lt + 500ml	2+2 pc.
NAT41132K + NAT 4104-2K	20Lt + 2Lt	



CLEANERS

Wooden floor cleaner NATURAQUA DECK SOAP

Water-based, pH neutral cleaner.

Suitable for all types of wood finishes. Ideal for routine cleaning of decking, fencing, furniture and other exterior surfaces, oiled or lacquered. It efficiently removes dirt and grease without damaging the wood. Suitable for daily use. Dilute 5-10% of the product with mains water.



Recommendations for application:

Apply the diluted product using soft brushes or synthetic mops, rub lightly and rinse.

+5°C
+30°C



Code	Cap.	Pack.
0026	1 Lt	12 pc.
0027	5 Lt	02 pc.
0026.10	10 Lt	
0026.25	25 Lt	

Daily cleaner NEUTRAL SOAP FOR WINDOW FRAMES

With cedar essential oil

The water-based soap for door and window fittings by Borma is the perfect solution for frequent cleaning of doors and windows and exterior surfaces in wood in general. Ecological, it delicately cleans all types of lacquered wood, guaranteeing total removal of dust and stains. Thanks to the essential oil content, it gives the treated surface a pleasant cedar scent.



Recommendations for application:

Apply in multiple passages on particular stubborn stains. It does not require any type of rinsing.

+5°C
+30°C



Code	Cap.	Pack.
NAT0020	500 ml	06 pc.
NAT0021	1Lt	02 pc.
NAT0021.5	5 Lt	
NAT0021.25	25 Lt	



REGENERATING PRODUCTS

Maintenance oil

EXTERIOR OIL REFRESHER

Ideal for maintenance of exterior wood previously treated with oils.

It replenishes and regenerates every surface type, giving further protection to the original oil finish of the manufactured piece. The presence of UV filters and special additives protect the wood from harmful agents, from direct sunlight and adverse weather conditions. It enhances its natural beauty with a natural, satin effect.



Recommendations for application:

It is recommended for seasonal maintenance of flooring and surfaces in general.



Code	Cap.	Pack.
3974	500 ml	12 pc.
3975	1 Lt	12 pc.
3975.05	5 Lt	02 pc.
3975.20	20 Lt	

Door and window fittings maintenance

WATER-BASED REFRESHER FOR WINDOW FRAMES

Special mix of acrylic resin dispersed in water, formulated for correct maintenance of the fittings.

Applied annually, it efficiently prolongs the life of the exterior finish, replenishing it and giving strength and shine to worn lacquer. Odour-free, excellent application and easy use. It can be applied indifferently on water and solvent-based finishes.



Recommendations for application:

Apply a film with a cloth on the clean surface and leave to dry without rubbing.



Code	Cap.	Pack.
NAT3908	500 ml	12 pc.
NAT3909	1Lt	12 pc.
NAT3909.5	5 Lt	02 pc.
NAT3909.25	25 Lt	

Door and window fittings maintenance

OIL REFRESHER FOR WINDOW FRAMES

Mix of natural oils and resins, ideal for caring for fittings.

It efficiently restores and protects the wooden surface of windows, doors and fittings in general previously finished with oil or lacquer.



Recommendations for application:

Application is recommended once a year to prolong the duration of the coating.



Code	Cap.	Pack.
3907	250 ml	12 pc.
3908	500 ml	12 pc.
3909	1 Lt	12 pc.
3909.05	5 Lt	02 pc.



Recommended Technologies

You are advised to avoid product application during periods of maximum exposure to the sun and heated supports.

Assessing maintenance frequency

Surface stress test	Horizontal surfaces	Vertical surfaces	Type of wood
High: maximum exposure	seasonal	Every 2-4 years	Oak or larch
Medium: partial exposure	annual	Every 5-7 years	Pine or fir
Low: minimum exposure	Every 3 years	Every 7-10 years	Pine or fir



Recommended application cycles

RENEW EXTERIOR WOODEN SURFACES - ECOLOGICAL CLEANING IN TWO STEPS:

EXTRA-INTENSIVE CYCLE: Extra strong wood cleaner + exterior wood cleaner



1	Prior wet abundantly the surface with water	<ul style="list-style-type: none"> Apply in slight excess Application time: 15-30 minutes Approximate yield: 10 m²/l
	0091 Naturaqua Extra strong wood cleaner	



2	Rub and rinse	<ul style="list-style-type: none"> Apply evenly on wet Drying time: 4-6h at 20°C Approximate yield: 10 m²/l
	0075 Naturaqua Exterior wood cleaner	

For a particularly smooth result, you are advised to sand before applying a new finish

Recommendations for subsequent finishing:
 ideal for oils: Terrace Oil, Thermowood Oil, Teak Oil, Decking Oil HD
 avoid water-based products

All finishing products are intended as being pigmented

Recommended Technologies

WHITENING AND PROTECTION OF WOODEN BEAMS, CEILING AND SURFACES IN GENERAL:

Whitening 2K super cleaner + Holzwachs lasur alf Heavy duty insulator



1	0060 Whitening 2K super cleaner	PRODUCT FOR PROFESSIONAL USE: <ul style="list-style-type: none"> Wear safety gloves and goggles Ask for the Technical Data Sheet
	Only use plastic tools and rinse	
	Leave to dry	12-24 h a 20°C
	For a particularly precise result, you are advised to sand	
2	3320-ALF Holzwachs lasur Heavy duty insulator	<ul style="list-style-type: none"> Drying time – 8h Sanding – not necessary Approximate yield 14-16 m2/l
	Recommendations for subsequent finishing: you can paint over with both oils and water-based products, as well as using traditional products	



WATER BASED CYCLE WITH EXTERIOR WOODSTAINS AND WAXY FINISHES: DURATION 5-7 YEARS

1	Remove traces of oil, grease, dirt, dust, previous finishes	
2	NAT3630 Naturaqua Borma Shield <i>Special primer</i>	<ul style="list-style-type: none"> Drying time - 2h Sanding – not necessary Approximate yield 16-20 m2/l
3	NAT3610 Naturaqua Holz Lasur <i>Exterior woodstain</i>	<ul style="list-style-type: none"> Drying time - 4h Sanding – not necessary Approximate yield 16-20 m2/l
4	0310 Naturaqua Log sealer <i>Sealer</i>	<ul style="list-style-type: none"> Drying time - 4h Sanding – not necessary
5	NAT3350 Naturaqua Top Gel <i>Waxy finish</i>	<ul style="list-style-type: none"> Drying time –3h Sanding - yes Approximate yield – 10-14 m2/l
6	NAT3350 Naturaqua Top Gel <i>Waxy finish</i>	<ul style="list-style-type: none"> Drying time – 24h Approximate yield – 10-14 m2/l



Recommended Technologies



TRADITIONAL CYCLE WITH EXTERIOR WOODSTAINS AND WAXED FINISHES: DURATION 5-7 YEARS





1	Remove all traces of oil, grease, dirt, dust and previous finishes	
2	 3630 Borma Shield <i>Special primer</i>	<ul style="list-style-type: none"> • Drying time – 12 - 24 h • Sanding – not necessary • Approximate yield – 16-20 m²/l
3	 3610 Holz Lasur <i>Exterior woodstain</i>	<ul style="list-style-type: none"> • Drying time – 12-24h • Sanding – not necessary • Approximate yield – 10-14 m²/l
4	 0310 Naturaqua Log sealer <i>Sealer</i>	<ul style="list-style-type: none"> • Drying time - 4h • Sanding – not necessary
5	 3305 Top Gel Tixo <i>Waxy finish</i>	<ul style="list-style-type: none"> • Drying time 8-12h • Sanding - yes, grain 240 • Approximate yield 12-16 m²/l
6	 3305 Top Gel Tixo <i>Waxy finish</i>	<ul style="list-style-type: none"> • Drying time 24h • Approximate yield 12-16 m²/l

All finishing products are intended as being pigmented and contain UV filters and preservatives






Recommended Technologies




TERRACE AND DECK OIL FINISH – DECORATIVE EFFECT - Restore annually

	1	Remove all traces of oil, grease, dirt, dust and previous finishes	
	2	0360 Teak oil	<ul style="list-style-type: none"> • Drying time – 4-6h • Sanding – not necessary • Approximate yield – 14-16 m2/l
	3	4971 Decking oil HD	<ul style="list-style-type: none"> • Drying time – 8-12 • Sanding – not necessary • Approximate yield - 16-20 m2/l
	4	4971 Decking oil HD	<ul style="list-style-type: none"> • Drying time – 24h • Approximate yield – 16-20 m2/l

TERRACE AND DECK OIL FINISH – NATURAL EFFECT - Restore annually

	1	Remove traces of oil, grease, dirt, dust, previous finishes	
	2	4971-IL Terrace Oil - Decking Oil Natural	<ul style="list-style-type: none"> • Drying time – 10-12h • Sanding – not necessary • Approximate yield - 16-20 m2/l
	3	4971-IL Terrace Oil - Decking Oil Natural	<ul style="list-style-type: none"> • Drying time – 24h • Approximate yield – 16-20 m2/l

OIL FINISH FOR TERRACE AND WOODEN FURNITURE IN HEAT-TREATED WOOD Restore annually

	1	Remove traces of oil, grease, dirt, dust, previous finishes	
	2	4978 Thermowood Oil	<ul style="list-style-type: none"> • Drying time – 8-12h • Sanding – not necessary • Approximate yield -20-24m2/l
	3	4978 Thermowood Oil	<ul style="list-style-type: none"> • Drying time – 24h • Approximate yield – 20-24 m2/l

Recommended Technologies



OIL FINISH FOR TERRACES AND DECKS - HIGH PERFORMANCE

1	Remove all traces of oil, grease, dirt, dust and previous finishes	
2	Optional/suggested: NAT3630 Naturaqua Borma Shield <i>Special primer</i>	<ul style="list-style-type: none"> • Drying time – 2h • Sanding – not necessary • Approximate yield - 16-20 m2/l
3	49712K Decking Oil 2K	<ul style="list-style-type: none"> • Drying time – none, proceed with wet on wet, however within 12 h • Sanding - no • Approximate yield – 30-50 m2/l
4	49712K Decking Oil 2K	<ul style="list-style-type: none"> • Drying time – 24-36h • Approximate yield – 30-50m2/l



WATER-BASED OILS FOR TERRACES AND DECKS:





Restore annually

1	Remove all traces of oil, grease, dirt, dust and previous finishes	
2	NAT4971 Naturaqua Decking Oil	<ul style="list-style-type: none"> • Drying time – 8h • Sanding – not necessary • Approximate yield -14-16 m2/l
3	NAT4971 Naturaqua Decking Oil	<ul style="list-style-type: none"> • Drying time – 24-36h • Approximate yield -14-16 m2/l







Recommended Technologies

HIGH PERFORMANCE, 2K LACQUER FOR TERRACES - DECORATIVE EFFECT

	1 Remove all traces of oil, grease, dirt, dust and previous finishes	
	2 3610 Holz Lasur	<ul style="list-style-type: none"> • Drying time – 12 - 24 h • Sanding – not necessary • Approximate yield – 10-14 m2/l
	3 Exterior wood Lack 2K	<ul style="list-style-type: none"> • Drying time – 12 h • Sanding yes – grain 150 -180 • Approximate yield – 10-14 m2/l • Recommended use 100-120 g/m2
	4 Exterior wood Lack 2K	<ul style="list-style-type: none"> • Drying time – 24 - 48h • Sanding – grain 150 - 180 in case of three coat cycle • Approximate yield – 10-14 m2/l

HIGH PERFORMANCE, 2K WATER-BASED LACQUER WITH HIGH PERFORMANCE FOR TERRACES - DECORATIVE EFFECT:

	1 Remove all traces of oil, grease, dirt, dust and previous finishes	
	2 NAT3610 Naturaqua Holz Lasur	<ul style="list-style-type: none"> • Drying time – 4h • Sanding – yes • Approximate yield – 16-20 m2/l
	3 Naturaqua Exterior wood lack 2k	<ul style="list-style-type: none"> • Drying time – 12h • Sanding – yes • Approximate yield – 10m2/l
	4 Naturaqua Exterior wood lack 2k	<ul style="list-style-type: none"> • Drying time – 36h • Approximate yield – 10m2/l

All finishing products are intended as being pigmented and contain UV filters and preservatives



Rapid drying

SOLVOIL 03

Special solvent for oils and wax

Especially for balanced dilution of the Borma Wachs oils range. Solvoil 03, thanks to its particularly gradual drying, reduces hardening over time of oils diluted with it.

Code	Cap.	Pack.
4930.03	1 Lt	12 pcs.
4931.03	5 Lt	02 pcs.
4932.03	25 Lt	



Medium drying

SOLVOIL 04

Special solvent for oils and wax

Especially for balanced dilution of the Borma Wachs oils range. Solvoil 04, thanks to its particularly gradual drying, allows regulation over time of hardening of the oils diluted with it, easing application and penetration in the wood, especially when working with exotic woods.

Code	Cap.	Pack.
4930.04	1 Lt	12 pcs.
4931.04	5 Lt	02 pcs.
4932.04	25 Lt	



Medium-slow drying

SOLVOIL 06

Special solvent for oils and wax

Especially for balanced dilution of the Borma Wachs oils range. Solvoil 06, thanks to its particularly gradual drying, extends the hardening time oils diluted with it.

Code	Cap.	Pack.
4930.06	1 Lt	12 pcs.
4931.06	5 Lt	02 pcs.
4932.06	25 Lt	



Aromatic-free

SOLVOIL PLUS

Special solvent for oils and wax

Ideal due to its balanced dilution of the Borma Wachs oils range. Solvoil PLUS, thanks to its particularly gradual drying, regulates the hardening time oils diluted with it. Odour and aromatic compounds-free.

Code	Cap.	Pack.
4930.PL	1 Lt	12 pcs.
4931.PL	5 Lt	02 pcs.
4932.PL	25 Lt	



HARDENER C001510

Catalyst for oil

Special drying mixture for oils. Added in 3-6% ratio it reduces the drying time of oils. Recommended for all the oils when applied in difficult conditions, like high humidity, greasy exotic woods, pigmented oils with high coverage (pigments strongly influence the oxidation). Shake well before use then add in the recommended quantity during mixing (see TDS).

Code	Cap.	Pack.
01510-1	1 Lt	12 pc.
01510	5 Lt	02 pc.



ANTISKIDDING ADDITIVE

Special additive to give non-slip properties to the Traditional Line of Borma oils. Ideal for exterior oils, in particular Decking Oil, to treat the edge of swimming pools, piers and any other surface which can often come in contact with water. It does not significantly alter the aesthetic appearance of the finish, guaranteeing excellent performance. It can be added in any ratio between 1 and 6% of the total.

Code	Cap.	Pack.
4967-AS	1 Lt	12 pcs.
4968-AS	5 Lt	02 pcs.
4969-AS	25 Lt	





BORMA WACHS[®]
Wood Professional Cosmetics

COL OR SYS TEM

Autonomously formulate the colours in an accurate and fast way, choosing from the new Borma collections or the most important international colour charts



Easily manage your colour selections



Create and record the colour recipes chosen by your clients




Reproduce, for each treatment or finishing product, the desired shade based on a sample



Achieve perfect cosmetic touch-ups of the colour of your finish

Discover
Borma ColorSystem

Color solutions for water-based products

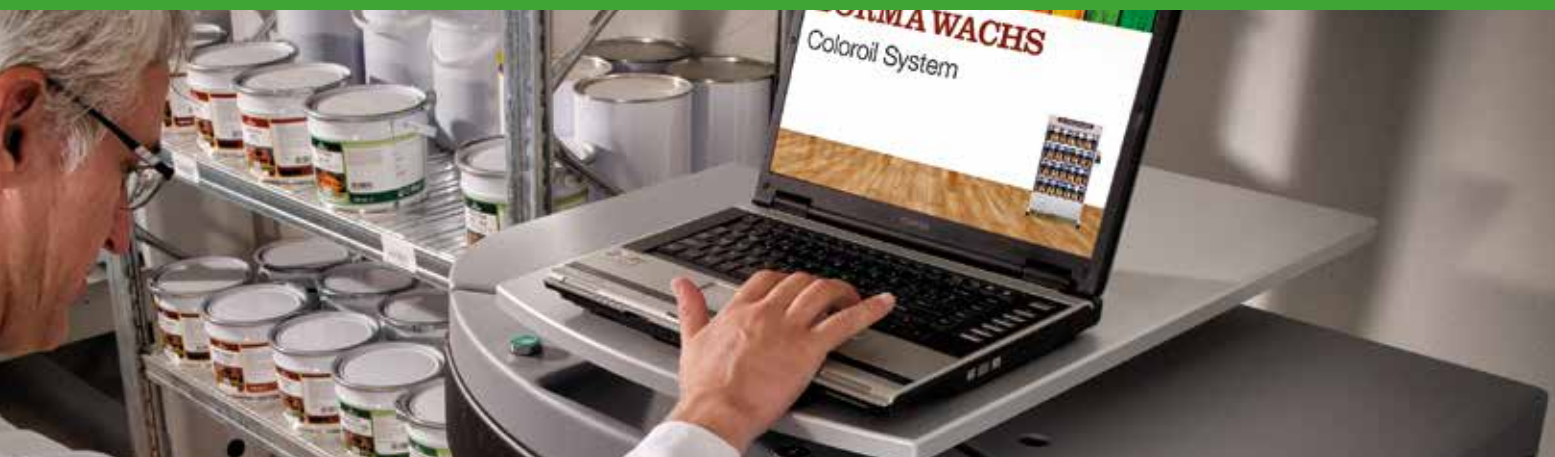

WATER-BASED PRODUCTS

NAT4090	NATURAQUA WOOD SEALER
NAT4090-S	NATURAQUA SUPER WOOD SEALER
NAT3630	NATURAQUA BORMA SHIELD
0310	NATURAQUA - LOG SEALER
NAT3610XX	NATURAQUA HOLZ LASUR
NAT3305XX	NATURAQUA HOLZWACHS LASUR
NAT3350XX	NATURAQUA TOP GEL - 30 MATT
NAT3315XX-DEC	NATURA DEKORWACHS LASUR
NAT3925	NATURAQUA FLATTING EXTRA MARINE
NAT0360	NATURAQUA TEAK OIL
NAT4971	NATURAQUA DECKING OIL
NAT4150	NATURAQUA EXTERIOR WOOD LACK



PIGMENTS FOR WATERBASED PRODUCTS

031 white
052 black
813 yellow oxide
515 red oxide
393 yellow oxide transparent
395 red oxide transparent
706 blue
057 green
701 medium yellow S
111 medium yellow
211 lemon yellow S
511 lemon yellow
411 orange
721 violet
821 black T
921 red
331 dark red

Borma Color System: tools

MANUAL BORMA COLOR SYSTEM

COMIX12/6	SIRIO MODULAR AGITATOR 12/6 12 positions for 1Lt and 6 positions for 3.5Lt, with 18 mixing lids Mod. Ring.
COMIX24/1	SIRIO MODULAR AGITATOR 24/1 24 positions for 1Lt, with 24 mixing lids Mod. Ring.

ACCESSORIES FOR THE COLOR SYSTEM

6463	ELECTRONIC COUNTER SCALE
------	--------------------------

Color solutions for Borma Classic and Oils products



BORMA CLASSIC AND OIL PRODUCTS

3630	BORMA SHIELD
3610XX	HOLZ LASUR
3320XX	HOLZWACHS LASUR
3305XX	TOP GEL TIXO
3315-HS	TOP GEL TIXO HS
3320XX-DEC	DEKORWACHS LASUR
3925	FLATTING EXTRA MARINE
0360	TEAK OIL
4971	DECKING OIL HD
4971-IL	TERRACE OIL - DECKING OIL NATURAL
4978	TERMOWOOD OIL - Oil for heat-treated wood
4971K	DECKING OIL 2 K
4150	EXTERIOR WOOD LACK
0000	HOLZWACHS LASUR HD50



PIGMENTS FOR BORMA CLASSIC AND OIL

051 white
052 black
593 yellow oxide
015 red oxide
293TR yellow oxide transparent
295TR red oxide transparent
516 blue
527 green
713 light yellow
653 warm yellow
834 orange
416 violet
525 light yellow
915 dark red
135 pink

AUTOMATIC BORMA COLOR SYSTEM

6480	16-CAN VOLUMETRIC-GRAVIMETRIC ELECTRONIC MIXER	
6480.OP	16-CAN VOLUMETRIC-GRAVIMETRIC ELECTRONIC MIXER	With assortment of oil based pigments
6480.WB	16-CAN VOLUMETRIC-GRAVIMETRIC ELECTRONIC MIXER	With assortment of water based pigments
6460	SPECTROPHOTOMETER Match-color - Colour reading and formulation	Mobile
6461	SPECTROPHOTOMETER Match-color - Colour reading and formulation	Counter



Care and passion for wood

Check the whole range for wood finishes
and care under:

www.bormawachs.com



Ward
as
r
m
a
s



BORMA WACHS®

Borma Range:

- Restoration
- Touch Up and Fillers
- Interior
- Exterior
- Gilding
- Decoration

Discover our products:



B.P.S. s.r.l.

Via Industria, 4

30029 San Stino di Livenza

Venezia Italy

Tel. +39 0421 951900

Fax +39 0421 951902

www.bormawachs.com

WAXES
DESIGN
STYLES
RESTORATION
INTERIORS
EXTERIORS
GILDING
DECORATION